BraunAbility

VA

# Chrysler Commercial Rear-Entry »» Simple Stow™













## Built on the Chrysler Pacifica

The BraunAbility Commercial Rear-Entry Simple Stow™ is a passenger-friendly mobility solution for commercial transportation providers.

The wheelchair ramp stows flat on the floor when not in use allowing rear hatch access for loading/unloading of luggage.

BraunAbility has a proven track record of producing economical and dependable commercial vehicles designed to keep you up and running day after day, year after year.


- **Seats up to 7 passengers*, or 5 passengers and 1 wheelchair position**
- **Radius floor provides easier wheelchair transition over rear axle**
- **OEM Tier 1 ramp latching system minimizing movement and noise**
- **Weatherproof mats provide enhanced floor protection and sound benefits**



* With optional 3rd row 2-passenger folding bench seat

# Chrysler Commercial Rear-Entry Simple Stow™



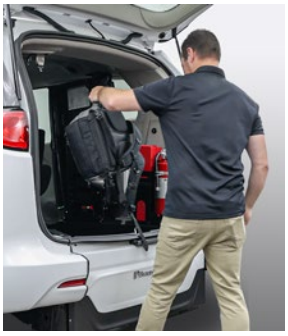

Simple Stow ramp allows easy access to luggage and cargo when the ramp is not in use.



2nd Row Seating provides room for 3 passengers. Optional aftermarket bench available.



Optional 3rd Row folding 2-passenger seat stows out of way during wheelchair use.

## Standard Features

- ADA, FMVSS and CMVSS compliant
- Meets/exceeds Altoona test requirements
- CARB compliant
- 56” rear door opening
- Lowered floor section, aft of 2nd row seats
- 34” wide manual ramp with 1,000 lb capacity
- 2nd row 3-passenger OEM bench remount
- ADA commercial flooring
- Wheelchair securement tie-downs – QRT MAX Slide-n-Click
- Transmission interlock
- ADA ramp lighting
- Emergency exit release for rear hatch
- Back-up alarm

## Optional Features

- 2nd row 3-passenger aftermarket bench
- 3rd row 2-passenger foldaway seat
- Vinyl cover kits for OEM seats
- DOT kit
- Additional wheelchair securement belts: QRT Deluxe, QRT MAX, QRT 360, QER Electric Front Retractors
- Additional set of lap and shoulder belts

**Radius Floor - Rounded lowered floor for easier transition for wheelchair passengers.**



**OEM Tier 1 latching system minimizes movement and ramp noise.**




**Weatherproof custom sculpted mats for enhanced floor protection and sound deadening benefits.**



## Dimensions

| | | |
|---|---|---|
| Lowered floor length | A | 59.75” |
| Lowered floor width | B | 34” |
| Ramp width (usable clear opening) | C | 33” |
| Ramp length (manual foldout) | D | 51.125” |
| Ground clearance at muffler (lowest point - loaded) | E | 5” |
| Entrance height | F | 56” |
| Overall vehicle height (hatch closed - unloaded) | G | 75” |
| Ramp angle* | H | 12° |

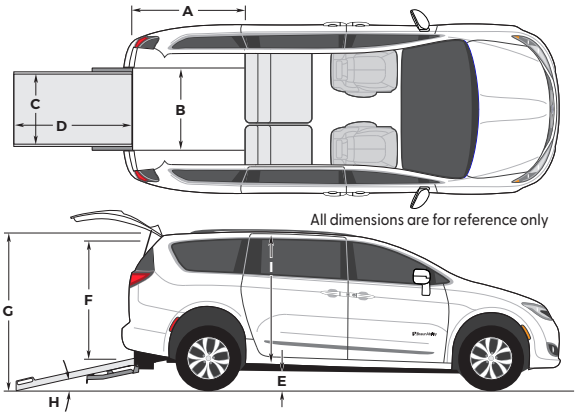


Due to manufacturing tolerances both with the OEM vehicle and the conversion components, all dimensions may vary slightly from those shown.

* Ramp angle may vary based on chassis trim level and other environmental factors